


4K Entry Displays Ideal for Presentation Use

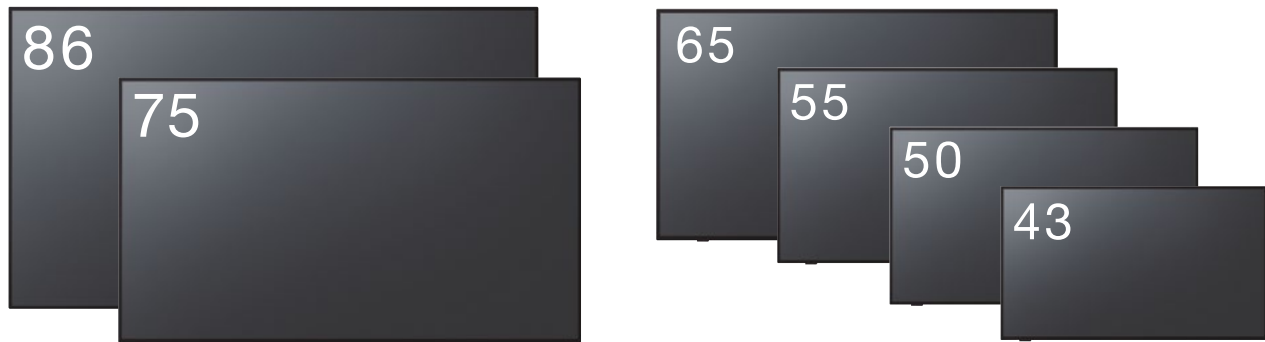

CQ1 Series						
	TH-86CQ1	TH-75CQ1	TH-65CQ1	TH-55CQ1	TH-50CQ1	TH-43CQ1
Screen Size	86-inch	75-inch	65-inch	55-inch	50-inch	43-inch
Brightness	400 cd/m ²					
Contrast	1200:1		3000:1	4000:1		
LCD Panel	IPS			VA		
Resolution	4K (3840 x 2160)					

- **Detailed Images**

Highly detailed images in 4K resolution (3840 × 2160) supporting 4K/60p signals for faithful expression of high-quality content.

- **Versatile Basic Terminals**

Ideal for presentations and information sharing in offices and classrooms. 16 hours of continuous operation for daily use.

- **Easy Installation**

Supports HDMI® CEC, LAN control. Six sizes allow users to choose the size that best suits the room space.

Specifications (Tentative)

Model	TH-86CQ1	TH-75CQ1	TH-65CQ1	TH-55CQ1	TH-50CQ1	TH-43CQ1	
Display Panel	Panel size	86-inch (2177.4 mm)	75-inch (1898.6 mm)	65-inch (1641.4 mm)	55-inch (1392.1 mm)	50-inch (1262 mm)	43-inch (1083.4 mm) (TBD)
	Panel type / Backlight	IPS/Edge LED			VA/Direct LED		
	Aspect ratio	16:9					
	Effective display area (W x H)	1897.6 x 1068.6 mm (74.70" x 42.00")	1654.1 x 932.1 mm (65.12" x 36.69")	1430.4 x 806.5 mm (56.31" x 31.75")	1213.4 x 684 mm (47.77" x 26.92")	1099.8 x 620.4 mm (43.29" x 24.42")	944.3 x 532.6 mm (37.17" x 42.65")
	Resolution	3840 x 2160					
	Brightness (typ.)	400 cd/m ²					
	Contrast ratio (typ.)	1200:1		3000:1	4000:1		
	Response time (typ.)	8.0 ms					
	Viewing angle [(T/B)/(L/R)]	178° / 178° (CR≥10)					
	Panel Surface Treatment	Anti-GlareType (Haze 2 %)					
Terminals	HDMI In	TYPE A Connector x 2					
	PC In/Audio In (L/R)	Mini D-sub 15-pin x 1 (Female)/Stereo Mini Jack (M3) x 1					
	Serial	D-sub 9-pin x 1 RS232C Compatible					
	IR Out	D-sub 9-pin (Remote Controller: IR Pass Through)					
	Audio Out	Stereo Mini Jack (M3) x 1					
	LAN	RJ45 x 1, 10 BASE-T / 100 BASE-TX					
	USB	USB Connector (TYPE-A) x 1, DC 5V/1A (USB 3.0 Supported)					
Built-in speaker	20W [10 W + 10 W]						
Power requirements	220-240 V AC, 50/60 Hz						
Power consumption	TBD	TBD	TBD	TBD	TBD	TBD	
Power off condition	TBD	TBD	TBD	TBD	TBD	TBD	
Standby condition	TBD	TBD	TBD	TBD	TBD	TBD	
Dimensions (W × H × D)	1929 x 1100 x 79 mm (75.92" x 43.2" x 3.12")	1684 x 966 x 94 mm (66.3" x 38.02" x 3.7")	1462 x 846 x 97 mm (57.58" x 33.32" x 3.81")	1239 x 718 x 79 mm (48.79" x 28.25" x 3.12")	1124 x 653 x 77 mm (44.25" x 25.7" x 3.04")	968 x 565 x 77 mm (38.12" x 22.26" x 3.03")	
Weight	TBD	TBD	TBD	TBD	TBD	TBD	
Bezel width	15.3mm (0.61") (T/B/L/R)	14.9 mm (0.59") (T/L/R) 18.4 mm (0.73") (B)	15.9mm (0.63") (T/L/R) 19.9 mm (0.79") (B)	12.9mm (0.51") (T/L/R) 14.7mm (0.58") (B)	11.9mm (0.47") (T/L/R) 14.4mm (0.57") (B)	11.9 mm (0.47") (T/L/R) 14.9 mm (0.59") (B)	
Wall-hanging pitch	600 x 400 mm (23.6" x 15.8") VESA compliant	400 x 400 mm (15.8" x 15.8") VESA compliant	400 x 200 mm (15.8" x 7.9") VESA compliant	200 x 200 mm (7.9" x 7.9") VESA compliant			
Operating time	16 h/day						
Operating environment	Temperature: 0 °C to 40 °C (32 °F to 104 °F)/Humidity: 20-80 % (Non condensation)/for up to 0-1400 m (4593 ft) altitude. Temperature: 0 °C to 35 °C (32 °F to 95 °F)/Altitude 1400-2800 m (4593 ft to 7874 ft)						

* Including remote controller sensor box.