


Standard Signage Displays Are Engineered for Confident and Reliable 24/7 Operation

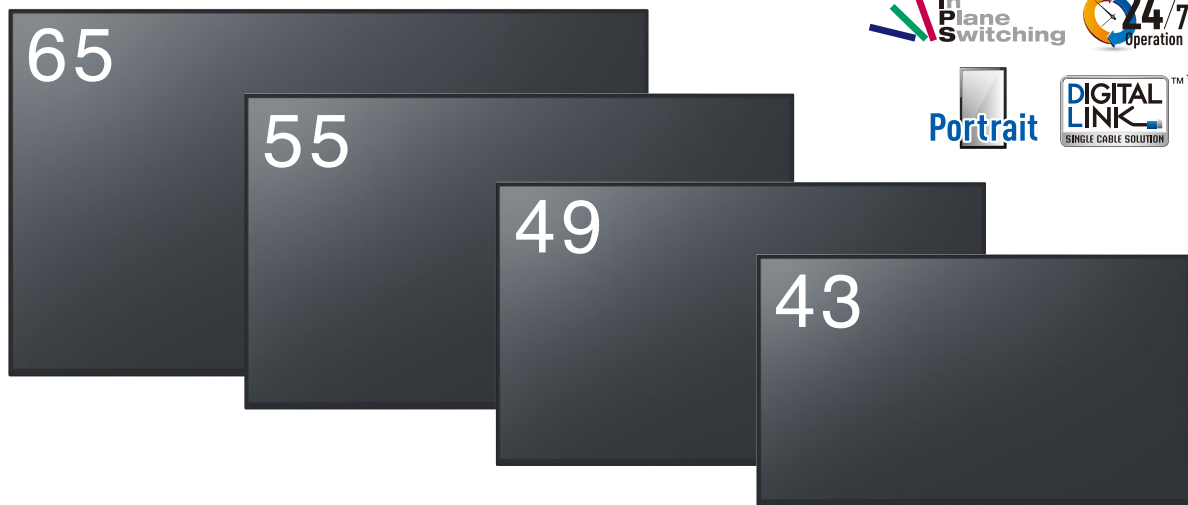

SF2 Series				
	TH-65SF2	TH-55SF2	TH-49SF2	TH-43SF2
Screen size	65-inch	55-inch	49-inch	43-inch
Panel/backlight	IPS / Edge LED			
Brightness	450 cd/m ²			
Contrast	1,300:1		1,100:1	
Operating time	24 hours/day			

Immersive Pictures from Advanced IPS Panel

- High 450 cd/m² Brightness Makes for Comfortable Viewing in Bright Spaces
- IPS Panel Preserves Color Accuracy and Visibility When Viewed Off-Axis
- Optimized Image Modes to Suit Specific Content, Video Sources, and Environments
- Slim-bezel Design Looks Great and Maximizes Viewable Screen Area in Smaller Physical Display Size

Easy-to-Install Self-Contained Signage

- DIGITAL LINK Transmits Video, Audio, and Control Signals up to 150 m (492 ft)* in Large Venues, Saving on Cabling Costs
- USB Media Player for Simple Signage Applications Without Set Top Box (STB)
- Content Management Software for Automated Signage Playback with Scheduling Function
- Data-cloning Function Copies Settings Data from Master Display via USB Memory or LAN to Slave Displays
- Easy Network Setup for Multiple Displays via USB Memory Cloning Function
- Supports CEC over HDMI® for Power On/Off Synchronized to Playback Control

Dependable and Consistent 24/7 Imaging Performance

- Efficiency and High Reliability for Continuous 24-hour Operation
- Failback/Failover Function for Emergencies When Signals Interrupted
- Customizable Image Display On Startup and When No Signal Is Detected
- Free Multi Monitoring & Control Software to Monitor and Control up to 2,048 Devices over LAN from Single PC
- Optional ET-SWA100 Series Early Warning Software to Monitor Device Status, History, and Send Alerts if Abnormalities are Detected

* TH-65SF2E and TH-65/55/49/43SF2W only. 150 m (492 ft) transmission available only with ET-YFB200G DIGITAL LINK Switcher for signals up to 1080/60p (dot clock frequency 148.5 MHz) in Long Reach Mode.

Specifications

Model	TH-65SF2	TH-55SF2	TH-49SF2	TH-43SF2
Display panel				
Screen size (diagonal)	65-inch (1,639 mm)	55-inch (1,387 mm)	49-inch (1,232 mm)	43-inch (1,079 mm)
Panel type	IPS/Edge LED			
Aspect ratio	16:9			
Effective display area (W x H)	1,428 x 803 mm (52.6" x 31.6")	1,209 x 680 mm (47.6" x 26.7")	1,073 x 604 mm (42.2" x 23.7")	941 x 529 mm (37.0" x 20.8")
Number of pixels (H x V)	1920 x 1080			
Brightness	450 cd/m ²			
Contrast ratio	1,300:1	1,100:1		
Dynamic contrast	50,000:1			
Response time	10 ms (G to G)	12 ms (G to G)		
Viewing angle (Horizontal/vertical)	178 °/178 ° (CR ≥ 10)			
Connection terminal				
Video In / Audio In	4-pole Mini-jack (M3) x 1			
HDMI In	HDMI TYPE A connector x 2			
DVI-D In	DVI-D 24-pin x 1 (DVI Revision 1.0 compliant), HDCP 1.1 compatible			
Audio In (L/R)	4-pole Mini-jack (M3) x 1 (Shared with PC/Video In)			
PC In	Mini D-sub 15-pin (DDC2B compatible) x 1			
Audio In (L/R)	4-pole Mini-jack (M3) x 1 (Shared with DVI-D/Video In)			
DVI-D Out	DVI-D 24-pin x 1 (DVI Revision 1.0 compliant), HDCP 1.1 compatible			
Audio Out (L/R)	Stereo Mini-jack (M3) x 1			
USB memory	USB TYPE A connector x 1, DC 5 V/1 A (USB 3.0 is not supported)			
Control				
Serial In/Out	D-sub 9-pin x 1/x 1, RS-232C compatible			
LAN	RJ45 x 1, 100BASE-TX, compatible with PLink™ for TH-65SF2E and TH-65/55/49/43SF2W (Shared with DIGITAL LINK); 10BASE-T/100BASE-TX, compatible with PLink™ for TH-55/49/43SF2E and TH-65/55/49/43SF2U			
DIGITAL LINK	RJ45 x 1, 100BASE-TX, compatible with PLink™ for TH-65SF2E and TH-65/55/49/43SF2W (Shared with LAN)			
IR In/Out	Stereo Mini-jack (M3) x 1/x 1			
Audio				
Built-in speaker	20 W [10 W + 10 W]			
Electrical				
Power requirements	110–127 V AC, 50/60 Hz, 220–240 V AC, 50/60 Hz			
Power consumption	155 W	115 W	110 W	95 W
On mode average power consumption*	124 W	87 W	73 W	61 W
Power off condition	Approx. 0.3 W			
Standby condition	Approx. 0.5 W			
Mechanical				
Dimensions (W x H x D)	1,452 x 834 x 64 mm (57.2" x 32.9" x 2.5")	1,234 x 710 x 46 mm (48.5" x 28.0" x 1.8")	1,098 x 634 x 46 mm (43.2" x 24.9" x 1.8")	965 x 559 x 46 mm (38.0" x 22.0" x 1.8")
Bezel width	T/R/L: 9.5 mm (0.38"), B: 15.7 mm (0.62")			
Weight	Approx. 29.8 kg (65.7 lbs.)	Approx. 18.0 kg (39.7 lbs.)	Approx. 14.7 kg (32.4 lbs.)	Approx. 10.7 kg (23.6 lbs.)
Wall-hanging pitch	VESA compliant 400 x 400 mm (15.8" x 15.8")			
Installation orientation	Landscape/Portrait			
Environment				
Operating environment	Temperature: 0 °C to 40 °C (32 °F to 104 °F) for up to 1,400 m altitude / 0 °C to 35 °C (32 °F to 95 °F) for between 1,400 m and 2,800 m altitude, Humidity: 20 % to 80 % (Non-condensation)			
Storage environment	Temperature: -20 °C to 60 °C (-4 °F to 140 °F) Humidity: 20 % to 80 % (Non-condensation)			
Operating time**	24 hours			

*1 Based on IEC 62087 Ed.2 measurement method. *2 Periodical display of moving video is recommended to prevent and/or correct image burn-in where a still image is displayed for long periods.

Optional Accessories

■ Pedestal

TY-ST43PE9 (43"/49")
TY-ST55PE9 (55"/65")

■ Early Warning Software

ET-SWA100 Series*

■ Auto Display Adjustment Upgrade Kit

TY-VUK10 Series

■ Digital Interface Box

ET-YFB100G

■ DIGITAL LINK Switcher

ET-YFB200G

* Part number suffix may differ depending on the license type.

Panasonic®

Weights and dimensions shown are approximate. Specifications and appearance are subject to change without notice. Product availability differs depending on region and country. This product may be subject to export control regulations. HDMI, the HDMI logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. PLink™ is a registered trademark or pending trademark in Japan, the United States, and other countries and regions. All other trademarks are the property of their respective trademark owners. © 2017 Panasonic Corporation. All rights reserved.



For more information about Panasonic Professional Displays, please visit:
Display Global Website – panasonic.net/cns/prodisplays
YouTube – www.youtube.com/PanasonicProDisplay

All information included here is valid as of July 2017.

SF2PRE2 Printed in Japan.