

## DS-D6032FN-B

### Indoor Wall-Mounted Digital Signage



The digital signage is used to broadcast information, release news, advertise products, etc., which is widely applicable to industry of entertainment, finance, traffic, etc.


- Plastic shell appearance, slim frame, and all-in-one design.
- Exquisite image, industrial A+ panel, auto-coloring and image-enhancing engine.
- Variable materials, static and dynamic materials, including the pictures, audio, video, scrolling subtitle, PDF, webpages, live video, number calling, pop-up pictures, etc.
- Flexible program schedule, free schedules and district play of multiple materials and variable play modes: play by day, play by week, play by loop, custom play, etc.
- Centralized management, remotely control and manage one screen or more screens, such as timed startup/shutdown, quick startup/shutdown, brightness/volume timed adjustment, and screenshot preview, remotely release programs and updates local (USB) programs.
- Organization permission, 5-level organization is available for managing materials, programs, terminals, and users, and support creating custom users, allocating permission for users according to user level, and permission templates.
- Multiple security safeguards, 3-level check of materials, programs and schedules to prevent mistake release, encryption of data in storage and transmission to prevent data tampering, and with no default password, users can activate and set initial password to guarantee the password safety.

## ▪ Specification

Model		DS-D6032FN-B
<b>Display</b>	Screen Size	32 inch
	Resolution	1920 × 1080
	Active Display Area	698.4 (H) mm × 392.85 (V) mm
	Pixel Pitch	0.12125 (H) mm × 0.36375(V) mm
	Backlight	E-LED
	Viewing Angle	178° (H)/178° (V)
	Brightness	350 cd/m <sup>2</sup>
	Contrast Ratio	4000 : 1
	Color Depth	8 bit, 16.7 M
	Response Time	6.5 ms
	Color Gamut	72% NTSC
	Reliability	7 × 24 h
	Refresh Rate	60 Hz
	<b>Built-in System</b>	Operation System
Processor		Cortex-A17, 4-core, main frequency 1.6 GHz
Memory		2 GB
Built-in Storage		16 GB EMMC
<b>Interface</b>	Video & Audio Input	AUDIO IN × 1, HDMI × 2, VGA × 1
	Video & Audio Output	AUDIO OUT × 1, speaker (8 Ω 2 W) × 2
	Network Interface	LAN × 1, Wi-Fi × 1
	Data Transmission Interface	USB 2.0 × 2, TF Card × 1, BT 4.0 × 1
<b>Power</b>	Standby Consumption	≤ 0.5 W
	Input Voltage	100 to 240 VAC, 50/60 Hz
	Power Consumption	≤ 75 W
<b>Working Environment</b>	Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Working Humidity	10% to 80% RH
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
	Storage Humidity	10% to 80% RH
<b>General</b>	Material Type	DAT, MPG, VOB, TS, AVI, MKV, MP4, MOV, 3GP, TS, FLV, WEBM, ASF, MP1, MP2, MP3, WMA, WAV, OGG, OGA, FLAC, ACC, M4A, XMF, MXMF, RTTTL, RTX, OTA, IMY, JPG, JPEG, BMP, GIF, PNG
	Mounting Type	Wall mounting (horizontally or vertically)
	Product Dimensions (W × H × D)	723.24 mm × 423.25 mm × 61.5 mm (with wall-mounted backboard) (28.47" × 16.66" × 2.42")
		723.24 mm × 423.25 mm × 45.13 mm (without wall-mounted backboard) (28.47" × 16.66" × 1.78")
	Package Dimensions (W × H × D)	898 mm × 152 mm × 544 mm (35.35" × 5.98" × 21.42")
	Net Weight	5.930 kg (13.01 lb.)
	Gross Weight	9.180 kg (20.13 lb.)
Packing List	Digital signage × 1, power cord × 1, remote control × 1, wall-mounted backboard × 1, package of mounting bolts × 1, wall-mounted screw × 4, desiccative × 1, quick start guide × 1	

## Physical Interface


Interface	Description	Interface	Description
100 ~ 240V~	Power supply	LAN	Ethernet interface
USB	USB 2.0 interface	AUDIO IN	Audio input interface
Audio out	Audio output interface	TF	TF card interface
Power	Power indicator	--	--



## Available Model

DS-D6032FN-B

## Dimension

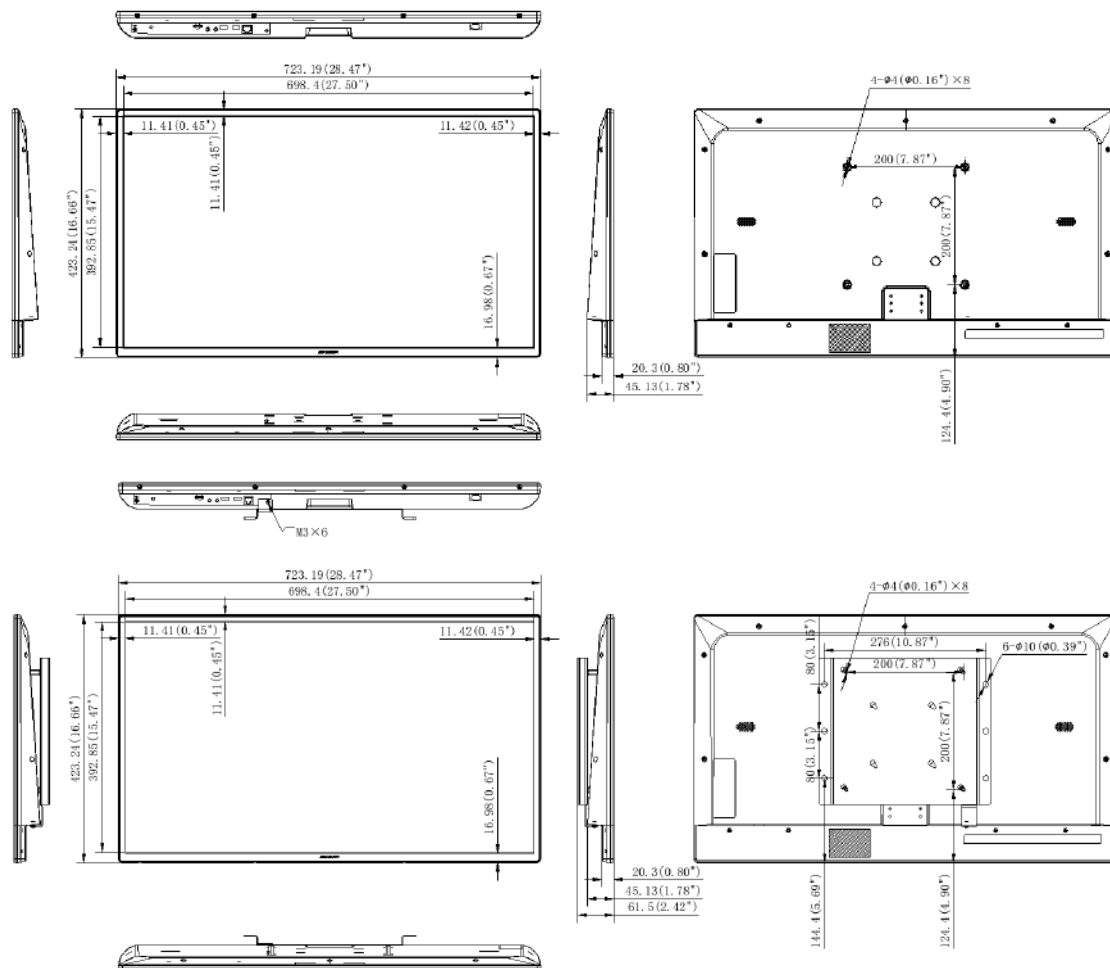

Unit: mm

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com

Follow us on social media to get the latest product and solution information.

